


**PROPRIETARY INFORMATION**  
 THE INFORMATION AND SCHEMES SHOWN HEREIN ARE PROPRIETARY TO THE G.C. BROACH COMPANY AND SHALL NOT BE REPRODUCED, USED, DISCUSSED, OR DISCLOSED TO OUR COMPETITORS OR THEIR AGENTS, WITHOUT EXPRESS WRITTEN PERMISSION FROM THE G.C. BROACH COMPANY.

NET OUTPUT = 152,900 PPH SATURATED STEAM @ 1250 PSIG  
 CAPACITY = 150 mm BTU/hr  
 DESIGN PRESSURE: 1350 PSIG  
 DESIGN TEMPERATURE: 725°F  
 OPERATING PRESURE: 1250 PSIG

ESTIMATED ASSEMBLED WEIGHT = 510,000 LBS. DRY  
 ESTIMATED ASSEMBLED WEIGHT = 620,000 LBS. FULL

F.J. = FIELD JOINT

# 150 mm BTU/hr BROACH HYBRID DRY STEAM GENERATOR

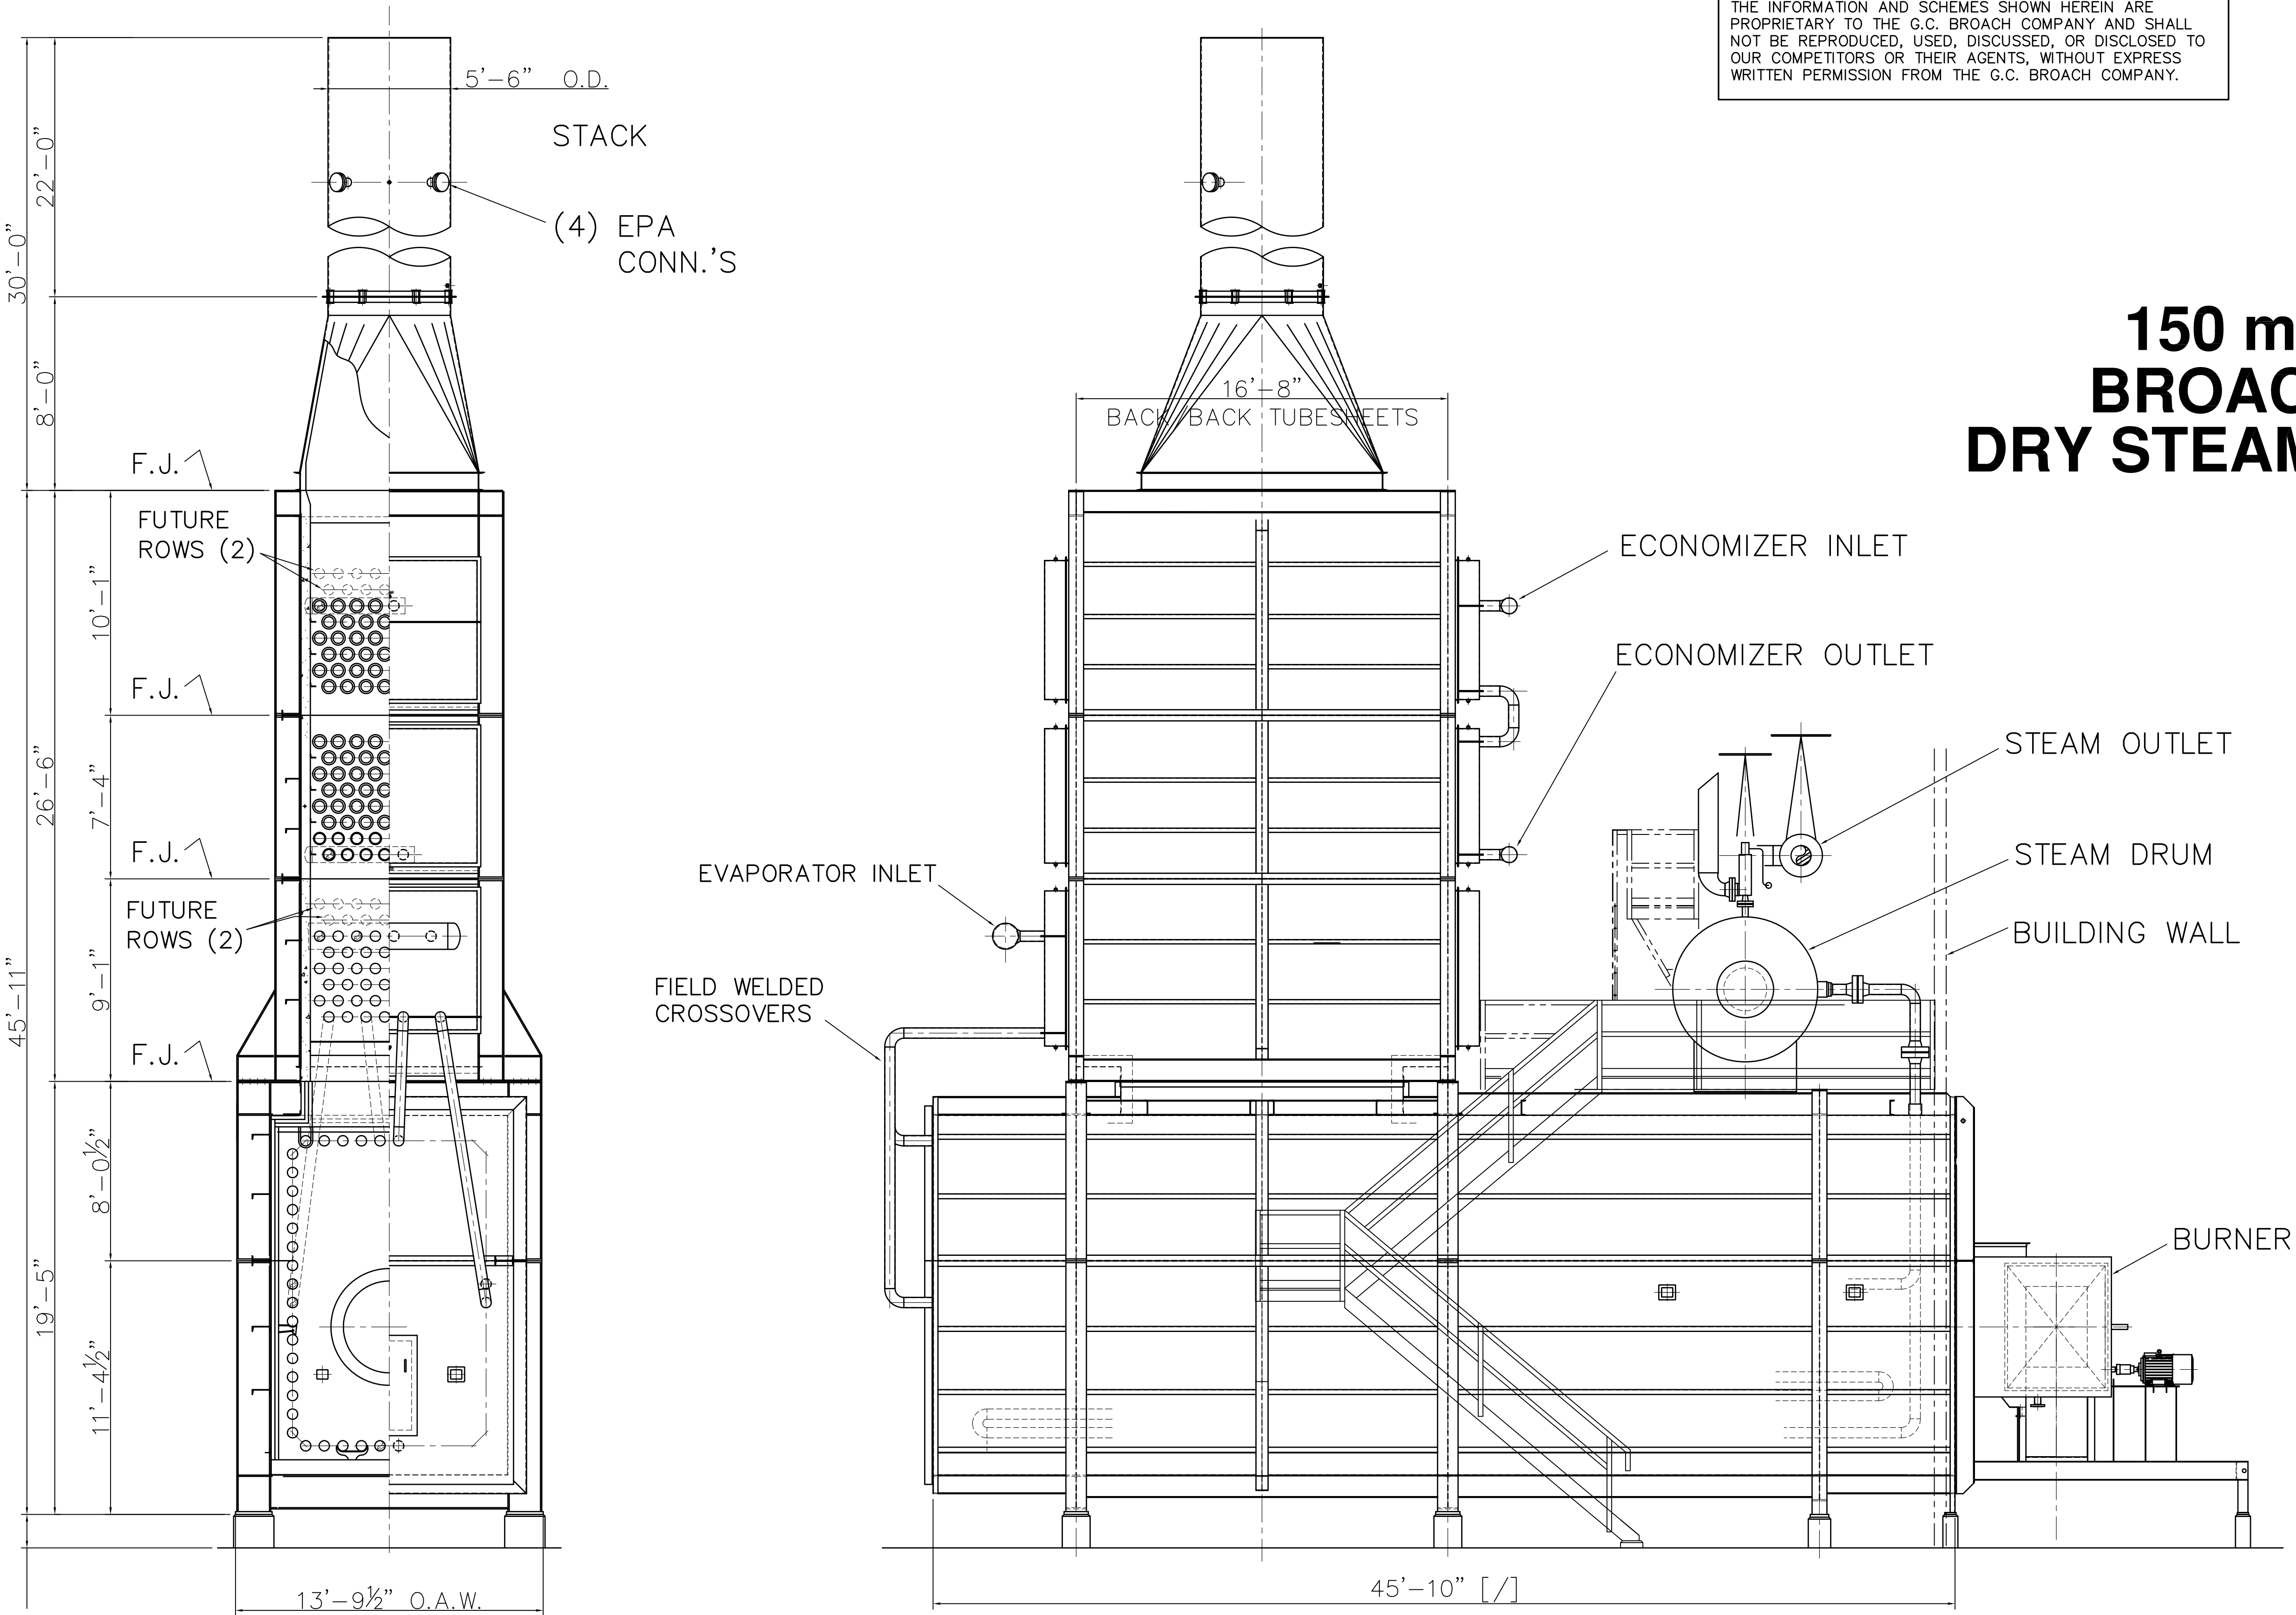

HALF SECTIONAL ELEVATION     HALF END ELEVATION  
TERMINAL END ELEVATION

SIDE ELEVATION

**NOTE:**  
 WORK THIS DWG. W/ DWG. # SK-14899C-2 AND # SK-14899C-3.

REVISIONS	FILE NAME: 14899C-1-0	LC # 000
	DWN M.T.S. 06/06/14	
	CHK	
	APPR	
	SCALE N.T.S.	JOB NO. P-14899C
		DWG NO. SK-14899C-1
		REV NO. 0

**PROCESS HEATERS**  
**BROACH**  
 THE G.C. BROACH COMPANY • 7667 E. 46TH PLACE • TULSA, OK. 74145

THE INFORMATION AND SCHEMES SHOWN HEREIN ARE PROPRIETARY TO THE G.C. BROACH CO. AND SHALL NOT BE REPRODUCED, USED, DISCUSSED, OR DISCLOSED TO OUR COMPETITORS OR THEIR AGENTS, WITHOUT EXPRESS WRITTEN PERMISSION FROM THE G.C. BROACH CO.

150 mm BTU/hr  
 BROACH HYBRID  
 DRY STEAM GENERATOR